


TOP ENTRY ROBOTS

T-SERIES 3 AXIS SERVO DRIVEN TOP ENTRY ROBOTS

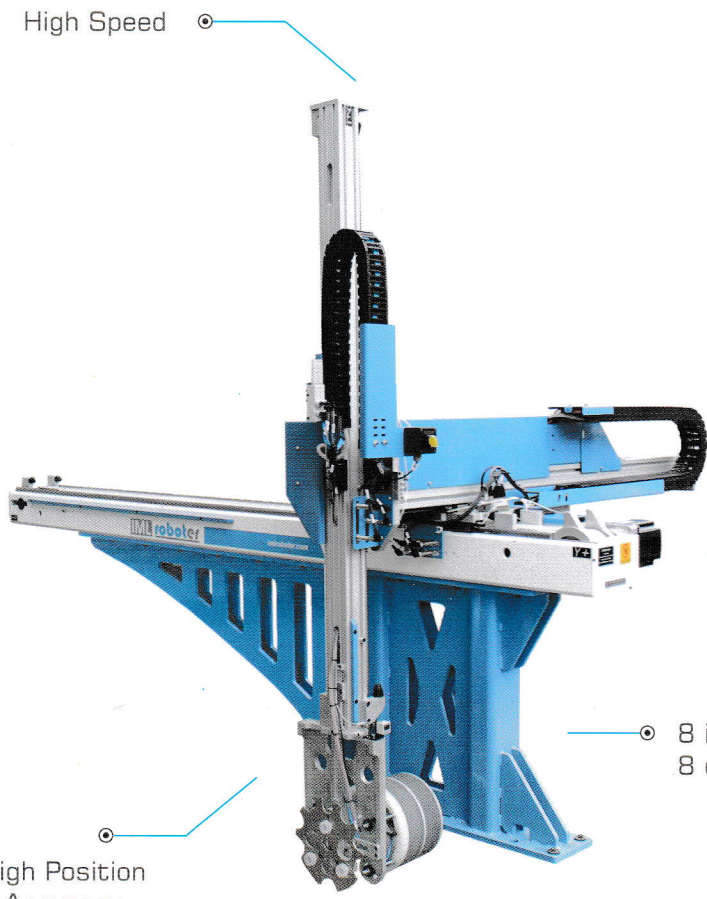

High Speed

Roboter Control Panel

- 2 languages, multiple language available
- User definible safe working areas
- Program backup / Restore via USB
- Multiple passwords allow customized protection levels
- Expandable and removable input and output
- Remote assistance via ethernet available
- Control system conditions and alarms

Flexibility

8 input
8 output

High Position Accuracy

Reliable Construction

		IMM Range	Horizontal X	Transverse Y	Vertical Z	Max Payload (Kg)
Working Strokes	T - SERIES	100-200 t	400 mm	1600 mm	800 mm	6
		150-350 t	500 mm	2000 mm	1200 mm	8
		400-800 t	900 mm	2600 mm	1800 mm	18
Power supply		380 V - 3 PH - 50 Hz				
Air supply		6 bar - 600 kPa				
<i>special strokes and devices available on request</i>						